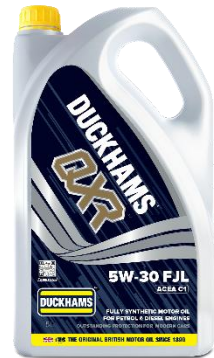


**PRODUCT DESCRIPTION****Duckhams QXR 5W-30 FJL**

Duckhams QXR 5W-30 FJL is a premium fully synthetic engine oil formulated to deliver excellent fuel efficiency, wear protection, and engine cleanliness. Designed for modern petrol and diesel engines, it performs exceptionally in both high-temperature and cold-start conditions. With a high viscosity index and strong detergent/dispersant properties, it supports extended drain intervals and protects critical engine components under demanding operating conditions.

---

**FEATURES AND BENEFITS**

- Fully synthetic formulation for improved fuel efficiency and engine cleanliness
  - Provides excellent protection during cold starts
  - Maintains stable performance across a wide range of temperatures
  - Offers strong protection against wear and deposits for longer oil life
  - Compatible with modern emission control systems
  - Delivers high thermal and oxidative stability under tough conditions
- 

**SPECIFICATIONS:**

ACEA C1  
Ford WSS-M2C934-B  
STJLR.03.5005 (verified)

**APPROVALS:**

Verified by Jaguar Land Rover to meet the requirements of STJLR.03.5005

**TYPICAL PHYSICAL CHARACTERISTICS**

Property	Unit	Typical Data
Viscosity		5W-30
Density @ 20°C	Kg/m <sup>3</sup>	0.853
KV100	cSt	10.1
KV40	cSt	57.9
VI	-	166
CCS	cP	4290
TBN		10.3
Sulphated Ash	%	1
Colour		Clear Amber
Flash (Closed)	°C	210
Pour Point	°C	-42

**HEALTH, SAFETY AND ENVIRONMENT**

Based on available information this product is not expected to present a significant health and safety hazard when used in the recommended applications and in accordance with the recommendations in the Safety Data Sheet. Safety Data Sheet available on request through your sales agent, or from the internet. Avoid prolonged or repeated contact with engine oils. Wash skin thoroughly after contact.

Protect the environment. Dispose of product and packaging in accordance with local regulations.

**STORAGE AND HANDLING**

Packed lubricants should be stored under cover. Where outside storage of drums is unavoidable, they should be laid horizontal to avoid water ingress. Product should not be stored in direct sunlight or excessively high, or low, temperatures. Duckhams can provide professional advice on the storage of lubricants.